

ASCO™ Gas Shutoff Valves

Direct Acting | 1/8" NPT

2/2
SERIES
256

Features

- 2-way normally closed operation
- For control of commercial and industrial gas pilot controls
- Brass body construction
- Mountable in any position
- Direct lift with resilient soft sealing for tight shutoff

Fluid

Fuel Gas

Construction

Valve Parts in Contact with Fluids	
Body	Brass
Core Tube/ Bonnet	Stainless Steel / Plated Steel
Core and Plugnut	Stainless Steel
Springs	Stainless Steel
Seals and Disc	NBR / FKM
Shading Coil	Copper

Electrical

Prefix	Standard Coil and Class of Insulation	Watt Rating and Power Consumption				Ambient Temp. °F	Spare Coil Family	
		DC Watts	AC		AC		DC	
			Watts	VA Holding				VA Inrush
U	F	6.9	6.3	8.8	12.1	-22 to 140	400117	400117
SC	F	6.9	6.3	8.8	12.1	-22 to 140	400127	400127

Standard voltages: 24, 120, 240 volts AC, 50-60 Hz. 12, 24, 120 volts DC
Must be specified when ordering.

Solenoid Enclosures

Standard: Open frame (Prefix U) 18" leads

Optional: DIN (size 11mm, form B) (Prefix SC). Watertight/IP-65 when used with DIN connector kit for SC coils (see kits below).

Valve Response Time


Opening Time: Less than 1 second

Closing Time: Less than 1 second

Kits

1/2" NPT conduit hub kit for leaded coils 224735-001-*
(Kit contains 10 pcs. of each: threaded hub, gasket and attaching screw.)

DIN connector kit for SC coils 226061-001-*
(Kit contains 10 pcs of each: connector, gasket, and attaching screw.)

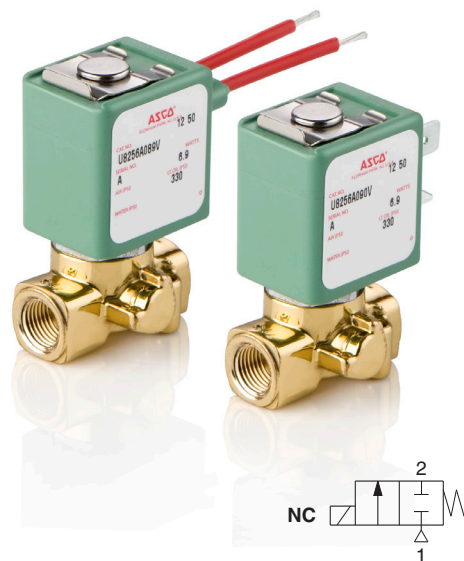

Approvals

UL recognized component to standard 429 "Electrically Operated Valves," Guide Y10Z2, File MP618 Safety Shutoff Valves.

CSA Certified to:

- 1) Standard C22.2 No. 139 "Electrically Operated Valves," File 235078.
- 2) Automatic Gas Valves Z21.21 (6.5), File 235078.
- 3) Automatic Gas Safety Shutoff Valves C/I (3.9), File 235078.

COMBUSTION


Specifications English units (Metric)

Pipe Size (in)	Orifice Size in (mm)	Flow Factor Cv (Kv)	Gas Capacity ① Btu/hr.	Operating Pressure Differential psi (bar)		Min. Fluid Temp. °F	Max. Fluid Temp. °F (°C)		Brass	Wattage		Approx. Shipping Weight lbs (kgs)	
				Max. AC Fuel Gas	Max. DC Fuel Gas		AC	DC					
Fuel Gas Shutoff - Normally Closed													
1/8	7/64 (2.8)	0.16 (0.14)	9000	0	200 (14)	65 (4)	-22 (-30)	180 (82)	180 (82)	U8256A091V ②	6.3	6.9	0.5 (0.22)

① 1" W.C. Drop @ 2" W.C. Inlet Pressure, 1,000 Btu/cu.ft. or more, 0.64 Specific Gravity Gas. ② For DIN option, replace U prefix with SC prefix.

Gas Flow Chart

Note: Flow curves are based on the following standard conditions: 5 psi (0.3 bar) inlet pressure and 68°F (20°C) fluid temperature.

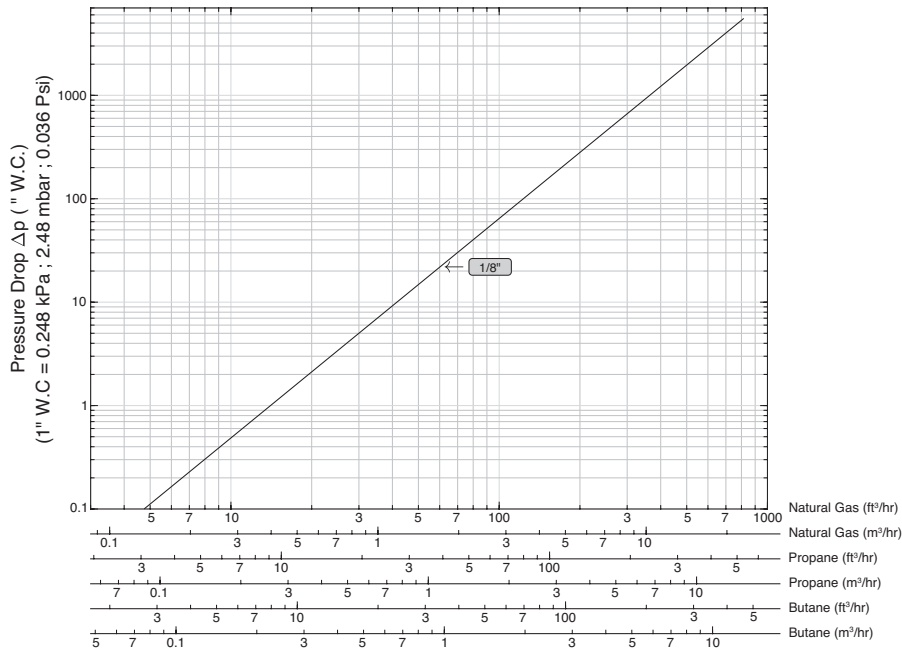

COMBUSTION

Dimensions: inches (mm)

Shown with DIN coil without connector

