


# SPECIAL FLUIDS VACUUM SERVICE

## Product Index

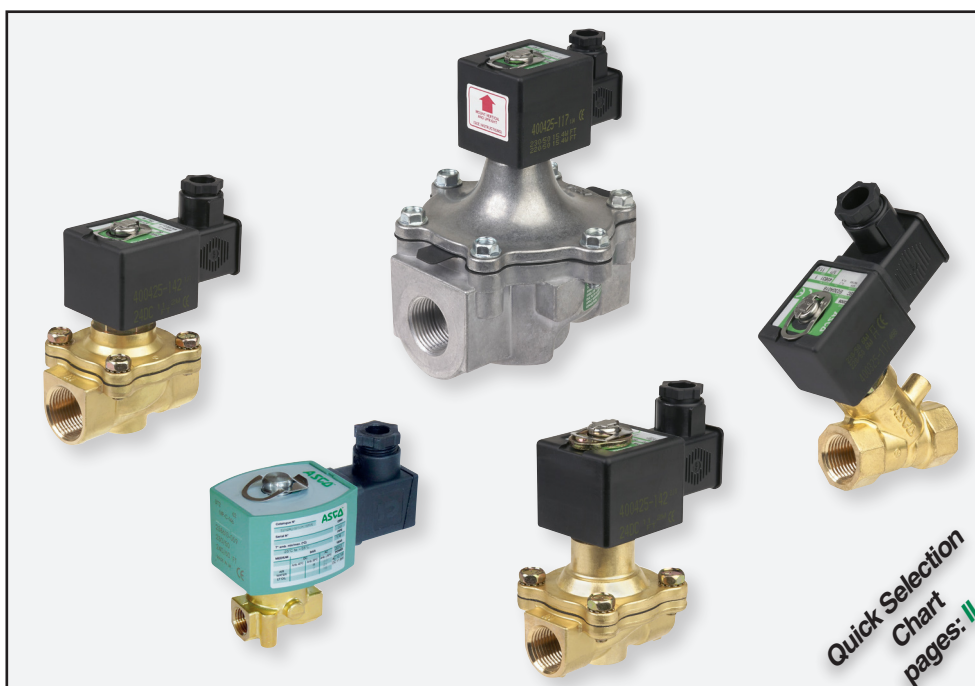

Quick Selection  
Chart  
pages: II

Fonction	Abs. pressure		Temperature		Pipe connections	Series	page
	min. (mbar)	min. (Torr)	min. (°C)	max. (°C)			
<b>SOLENOID VALVES, BRASS BODY</b>							
NC	1,33.10 <sup>-6</sup>	10 <sup>-6</sup>	-25	+80	1/4	<a href="#">262</a>	<b>1</b>
	1,33.10 <sup>-6</sup>	10 <sup>-6</sup>	-20	+90	3/8 - 1/2	<a href="#">030</a>	<b>5</b>
NC-NO	1,33.10 <sup>-6</sup>	10 <sup>-6</sup>	-20	+90	3/8 .. 3/4	<a href="#">210</a>	<b>7</b>
2/2 NC-NO	10 <sup>-4</sup>	7,5.10 <sup>-5</sup>	-20	+100	Coaxial	3/8 .. 1	<a href="#">287</a> <sup>(1)</sup>
3/2 NC-NO	10 <sup>-4</sup>	7,5.10 <sup>-5</sup>	-20	+100	Coaxial	3/8 .. 1	<a href="#">387</a> <sup>(3)</sup>
<b>SOLENOID VALVES, ALUMINIUM BODY</b>							
NC	1,33.10 <sup>-6</sup>	10 <sup>-6</sup>	-20	+90	1 .. 2	<a href="#">215</a>	<b>9</b>
<b>SOLENOID VALVES, STAINLESS STEEL BODY</b>							
2/2 NC-NO	10 <sup>-4</sup>	7,5.10 <sup>-5</sup>	-20	+100	Coaxial	3/8 .. 1	<a href="#">287</a> <sup>(1)</sup>
<b>VALVES, BRASS BODY</b>							
2/2 NC-NO	10 <sup>-4</sup>	7,5.10 <sup>-5</sup>	-20	+100	Coaxial	3/8 .. 1	<a href="#">287</a> <sup>(2)</sup>
3/2 NC-NO	10 <sup>-4</sup>	7,5.10 <sup>-5</sup>	-20	+100	Coaxial	3/8 .. 1	<a href="#">387</a> <sup>(4)</sup>
<b>VALVES, BRONZE BODY</b>							
2/2 NC-NO	1,33.10 <sup>-3</sup>	10 <sup>-3</sup>	-10	+184	Threaded ports <sup>(1)</sup>	3/8 .. 2 1/2	<a href="#">E290</a> <sup>(2)</sup>
					Flanged <sup>(1)</sup>	DN 25..50	<a href="#">T290</a> <sup>(2)</sup>
3/2 NC-NO	1,33.10 <sup>-3</sup>	10 <sup>-3</sup>	-10	+184	Threaded ports <sup>(1)</sup>	1/2 .. 2	<a href="#">E390</a> <sup>(4)</sup>
<b>VALVES, STAINLESS STEEL BODY</b>							
2/2 NC-NO	10 <sup>-4</sup>	7,5.10 <sup>-5</sup>	-20	+100	Coaxial	3/8 .. 1	<a href="#">287</a> <sup>(2)</sup>
					Threaded ports <sup>(1)</sup>	1/2 .. 2 1/2	<a href="#">E290</a> <sup>(2)</sup>
					External thread <sup>(1)</sup>	1/2..1	<a href="#">U290</a> <sup>(2)</sup>
					Ext. thread, foods connections DIN 11851 <sup>(1)</sup>	RD 28x1/8 .. 44x1/6	<a href="#">Y290</a> <sup>(2)</sup>
	1,33.10 <sup>-3</sup>	10 <sup>-3</sup>	-10	+184	Clamp / Butt welding <sup>(1)</sup>	DN 10..65	<a href="#">S290</a> <sup>(2)</sup>
					Threaded ports (PN40)	1/2 .. 2	<a href="#">E298</a> <sup>(2)</sup>
					Flanged (DIN and ANSI Class 300)	DN 15..50	<a href="#">T298</a> <sup>(2)</sup>
					Socket welding ends	DN 15..50	<a href="#">S298</a> <sup>(2)</sup>
3/2 U	10 <sup>-2</sup>	10 <sup>-2</sup>	-25	+250	Threaded ports (PN40)	1/2 .. 2	<a href="#">E398</a> <sup>(4)</sup>
					Flanged (DIN and ANSI Class 300)	DN 15..50	<a href="#">T398</a> <sup>(4)</sup>
					Socket welding ends	DN 15..50	<a href="#">S398</a> <sup>(4)</sup>

<sup>(1)</sup> With FPM disc, see: [Pressure Operated Valves \(2/2\)](#), [[www.asco.com](http://www.asco.com)].

Solenoid Valves (2/2) <sup>(1)</sup>  
 Pressure Operated Valves (2/2) <sup>(2)</sup>  
 Solenoid Valves / Pneumatic Valves (3/2) <sup>(3)</sup>  
 Pressure Operated Valves (3/2) <sup>(4)</sup>

(Potentially explosive atmospheres, see page: II)

All leaflets are available on: [www.asco.com](http://www.asco.com)

00120GB-2018/R01  
Availability, design and specifications are subject to change without notice. All rights reserved.

